
CABLES

POLYCAB



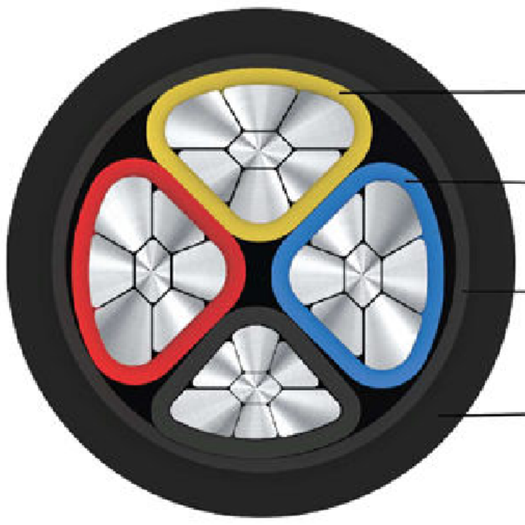

LT XLPE CABLE

TDS Doc.No:PIL/TE/250425/000390

DESIGN CODE : LVIS09AXUAY23.5C035SA001S

Particulars			3.5 Core X 35 Sq.mm
Name of Manufacturer			Polycab India Ltd
Type of cable			A2XY
Voltage Grade V			1100
No of cores X size in sqmm			3.5 Core X 35 Sq.mm
Conductor			
a)	Material		H2/H4 Grade Aluminium as per Class 2 of IS: 8130/2013, latest
b)	Max. d.c. resistance of conductor at 20° C (ohm/km)	Main	0.868
		Neutral	1.91
c)	Shape of the conductor		Stranded Compacted Sector
Insulation			
a)	Material		XLPE as per IS 7098(Pt-1)/88, Latest
b)	Nominal thickness (mm)	Main	0.9
		Neutral	0.7
c)	Core identifcation		Red,Yellow,Blue,Black
Inner Sheath			
a)	Material		Extruded PVC Type ST2 as per IS:5831/84
b)	Minimum thickness (mm)		0.3
Outer Sheath			
a)	Material		Extruded PVC Type 'ST2' as per IS:5831
b)	Thickness (mm)		2.0 (Nom.)
c)	Colour of outer sheath.		Black
Electrical Parameters			
a)	Max. a.c. resistance of conductor at 90° C (ohm/km)		1.11
b)	Calculated Cable reactance (ohm/km)		0.0787
c)	Impedance of cable (ohm/km)		1.11
d	Approx. Cable Capacitance (mfd/km)		0.00
Maximum conductor temperature under normal operating conditions			90°C

Format ID: TE/QMS/F/07, R-00, Date: 16/03/2025

Maximum conductor temperature at the termination of short circuit	250°C
Short Circuit rating of conductor for the duration of 1 sec (kA)	3.31
Continuous Current carrying capacities :-	
(a) In Ground at 30°C (A)	114
(b) In Air at 40°C (A)	114
Applicable Standard	IS 7098 Part I/88, IS 8130/2013, IS 5831/84 etc. with latest up to date amendments
Approx. overall diameter of the cable in mm	23.5 ± 2.0
Minimum bending radius	12 times Overall diameter
Max. Tensile strength	
(i) for Cables pulled with stocking (Newtons)	5 x D^2, D is the cable OD in mm
ii) for Cables pulled with pulling eyes (N)	3,630
Embossing	POLYCAB ELECTRIC 1100 VOLTS GRADE XLPE
Printing	YEAR POLYCAB ELECTRIC 1100 VOLTS GRADE XLPE , CABLE SIZE, CABLE TYPE WITH SEQUENTIAL MARKING at every one meter interval.
Standard Drum Length (Mtr.)	1000 ± 5%
Non-Standard Drum Length (Mtr.)	Maximum 5% of order quantity

Note:-The values given above are subject to tolerances as per the relevant standards