

CABLES

POLYCAB

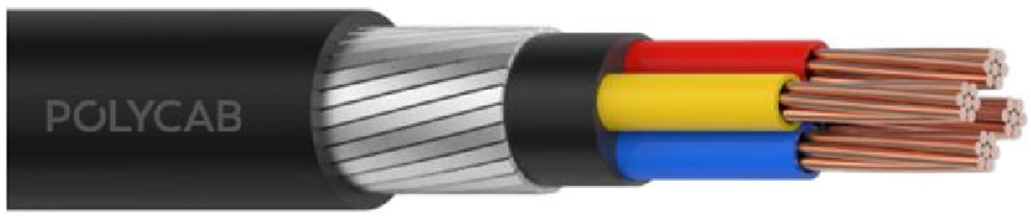

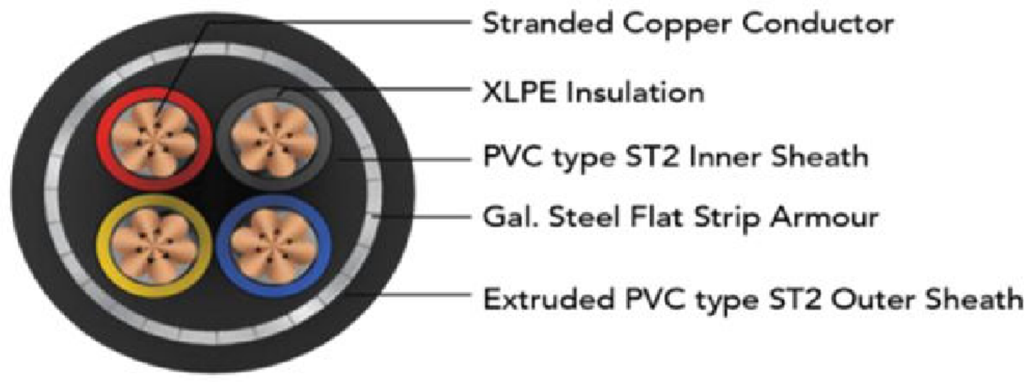

LT XLPE CABLE

TDS Doc.No:PIL/TE/250425/000121 **DESIGN CODE: LVIS09CXSFY2004C010SA001S**

	Particulars	4 Core X 10 Sq.mm
	Name of Manufacturer	Polycab India Ltd.
	Type of cable	2XFY
	Voltage Grade V	1100
	No of cores X size in sqmm	4 Core X 10 Sq.mm
	Conductor	
a)	Material	Plain annealed Copper as per Class 2 of IS:8130/2013
b)	Max. d.c. resistance of conductor at 20° C (ohm/km)	1.83
c)	Shape of the conductor	Stranded Circular
	Insulation	
a)	Material	XLPE as per IS 7098(Pt-1)/88, Latest
b)	Nominal thickness (mm)	0.7
c)	Core Identification	Red,Yellow, Blue & Black
	Inner Sheath	
a)	Material	Extruded PVC Type 'ST2' as per IS:5831/84
b)	Minimum thickness (mm)	0.3
	Armouring	
a)	Material	Gal.Steel
b)	Type of armouring	Flat Strip
c)	Nominal size of armour (mm)	4.0 x 0.8
d)	Tolerance	+/- 10%
	Outer Sheath	
a)	Material	Extruded PVC Type 'ST2' as per IS:5831/84
b)	Thickness (mm)	1.24 (Min.)
c)	Colour of outer sheath.	Black
	Electrical Parameters	
a)	Max. a.c. resistance of conductor at 90° C (ohm/km)	2.33
b)	Calculated Cable reactance (ohm/km)	0.0842
c)	Impedance of cable (ohm/km)	2.33
d)	Approx. Cable Capacitance (mfd/km)	0.32
	Maximum conductor temperature under normal operating conditions	90°C

Format ID: TE/QMS/F/07, R-00, Date: 16/03/2025

	Maximum conductor temperature at the termination of short circuit	250°C
	Short Circuit rating of conductor for the duration of 1 sec (kA)	1.43
	Continuous Current carrying capacities :-	
(a)	In Ground at 30°C (A)	74
(b)	In Air at 40°C (A)	70
	Applicable Standard	Generally as per IS 7098 Part I/88, IS 8130/2013, IS 5831/84, IS 3975/1999 etc. with latest up to date amendments
	Approx. overall diameter of the cable in mm	19.0 ± 2.0
	Minimum bending radius	12 times Overall diameter
	Max. Tensile strength	
(i)	for Cables pulled with stocking (Newtons)	9 x D^2, D is the cable OD in mm
ii)	for Cables pulled with pulling eyes (N)	2000
	Embossing	POLYCAB ELECTRIC 1100 VOLTS GRADE XLPE
	Printing	YEAR POLYCAB ELECTRIC 1100 VOLTS GRADE XLPE CABLE SIZE CABLE TYPE WITH SEQUENTIAL MARKING at every one meter interval.
	Standard Drum Length (Mtr.)	1000 ± 5%
	Non- Standard Drum Length (Mtr.)	Maximum 5% of order quantity

Note:-The values given above are subject to tolerances as per the relevant standards